


PERMANENT MAGNETIC MICROPITCH CHUCK – FP NEO

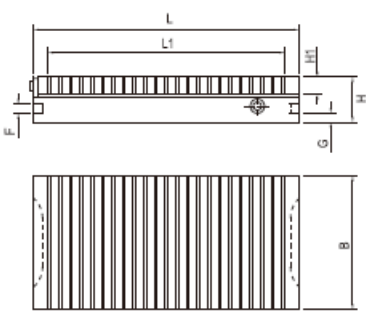

| Part Number | Dimensions (mm) | | | | | | Weight Kg |
|----------------|-----------------|-----|-----|----|----|----|-----------|
| | L | L1 | B | H | F | G | |
| 2001/01/13070 | 130 | 101 | 70 | 49 | 10 | 10 | 4 |
| 2001/01/150150 | 150 | 108 | 150 | 51 | 10 | 10 | 9 |
| 2001/01/175100 | 175 | 145 | 100 | 49 | 10 | 10 | 7 |
| 2001/01/250130 | 250 | 220 | 130 | 49 | 10 | 10 | 12 |
| 2001/01/250150 | 250 | 220 | 150 | 51 | 10 | 10 | 15 |
| 2001/01/300150 | 300 | 257 | 150 | 51 | 10 | 10 | 18 |
| 2001/01/350150 | 350 | 305 | 150 | 51 | 10 | 10 | 21 |
| 2001/01/400150 | 400 | 357 | 150 | 51 | 10 | 10 | 24 |
| 2001/01/450150 | 450 | 407 | 150 | 51 | 10 | 10 | 27 |
| 2001/01/400200 | 400 | 357 | 200 | 51 | 10 | 10 | 32 |
| 2001/01/450200 | 450 | 407 | 200 | 51 | 10 | 10 | 36 |
| 2001/01/500200 | 500 | 455 | 200 | 51 | 10 | 10 | 40 |
| 2001/01/600200 | 600 | 535 | 200 | 51 | 10 | 10 | 48 |
| 2001/01/350250 | 350 | 305 | 250 | 56 | 10 | 10 | 38 |
| 2001/01/500250 | 500 | 435 | 250 | 56 | 10 | 10 | 55 |
| 2001/01/400300 | 400 | 357 | 300 | 56 | 10 | 10 | 52 |
| 2001/01/500300 | 500 | 455 | 300 | 56 | 10 | 10 | 66 |
| 2001/01/600300 | 600 | 535 | 300 | 56 | 10 | 10 | 79 |

Other dimensions on request.

Use : Grinding, EDM of small and thin workpieces. Holds also large workpieces as well.

Features :

- Pole pitch : 2 mm (1.5mm steel + 0.5 mm brass)
- Neodymium magnetic system generating 30% higher force compared to other micropitch chucks.
- Waterproof design.
- High precision and low remaining magnetism.
- Uniform magnet force distribution over the entire working area.
- Clamping force up to 120 N/cm²